R720 Indoor 802.11ac Wave 2 4x4:4 Wi-Fi Access Point with 2.5Gbps backhaul



DATA SHEET



BENEFITS

MULTI-GIGABIT ACCESS SPEEDS

Liberate the multi-gigabit power of Wave 2 Wi-Fi by using built-in 2.5GbE (802.3bz) backhaul to connect to multi-gigabit switches.

STUNNING PERFORMANCE

Provide a great user experience no matter how challenging the environment with BeamFlex+[™] adaptive antenna technology and a library of 4K+ directional antenna patterns.

SERVE MORE DEVICES

Connect more devices simultaneously with four MU-MIMO spatial streams and concurrent dual-band 2.4/5GHz radios while enhancing non-Wave 2 device performance.

MULTIPLE MANAGEMENT OPTIONS

Manage the R720 from the cloud, or with on-premises physical/virtual appliances.

AUTOMATE OPTIMAL THROUGHPUT

ChannelFly[™] dynamic channel technology uses machine learning to automatically find the least congested channels. You always get the highest throughput the band can support.

BETTER MESH NETWORKING

Reduce expensive cabling, and complex mesh configurations by checking a box with SmartMesh[™] wireless meshing technology to dynamically create self-forming, selfhealing mesh networks.

EXPANDABLE CAPABILITIES

Augment AP capabilities through the onboard USB 2.0 port to provide additional technologies like BLE.

MORE THAN WI-FI

Support services beyond Wi-Fi with <u>Ruckus</u> <u>IoT Suite</u>, <u>Cloudpath</u> security and onboarding software, <u>SPoT</u> Wi-Fi locationing engine, and <u>SCI</u> network analytics. A perfect storm of technology trends—the Internet of Things (IoT), bandwidth-hungry cloud and video applications, an explosion of new devices—is driving organizations in every industry to upgrade their WLAN infrastructure. 802.11ac Wave 2 can deliver the performance you need, but it can also quickly overload existing 1 Gbps backhaul connections. Who wants to bear the cost of running more Ethernet and using more switch ports to ensure greater throughput between wired and wireless?

The Ruckus R720 indoor access point is our highest-capacity four-stream 802.11ac Wave 2 Wi-Fi AP. It features multi-gigabit technology, so you can step up to faster Wi-Fi speeds and 2.5GbE backhaul connectivity without having to replace your Cat 5e cabling or use additional switch ports. Deploy a high-performance, highly resilient Wi-Fi network without breaking the bank.


With hundreds of devices and nonstop wireless noise and interference, busy indoor environments can be the most challenging Wi-Fi deployments. The R720 makes it easy to deliver reliable, high-performance connectivity in large enterprises, office buildings, university campuses, convention centers, and practically any other indoor space.

The R720 802.11ac Wave 2 Wi-Fi AP incorporates patented technologies found only in the Ruckus Wi-Fi portfolio.

- Extended coverage with patented BeamFlex+ utilizing multi-directional antenna patterns
- Improve throughput with ChannelFly which dynamically find less congested Wi-Fi channels to use


With four stream MU-MIMO connectivity, the R720 can simultaneously transmit to multiple Wave 2 clients in the widest available channels, drastically improving RF efficiency even for non-Wave 2 clients. Additionally, the R720's integrated multigigabit technology provides a 2.5Gbps Ethernet interface, so you can more than double your backhaul capacity utilizing existing switches.

Whether you're deploying ten or ten thousand APs, the R720 is also easy to manage through Ruckus' appliance, virtual and cloud management options.

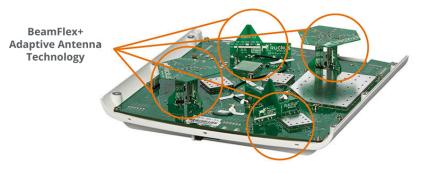




Blinding fast Wave 2 4x4:4 802.11ac with MU-MIMO

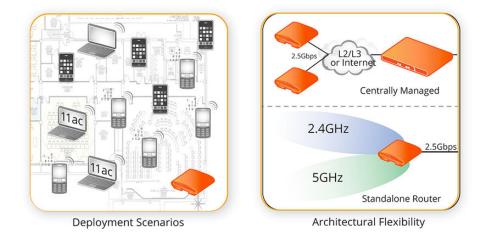



Weight is 1.12 kg. (2.5 lbs.)



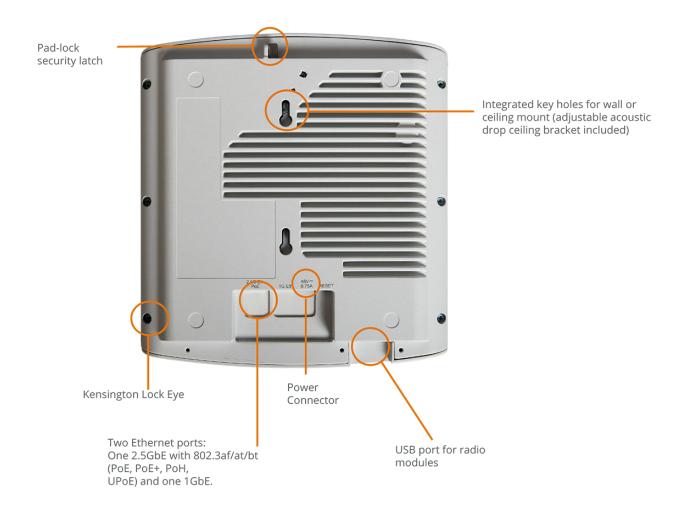

DATA SHEET

Figure 1. Example of BeamFlex+ pattern


Ī

ACCESS POINT ANTENNA PATTERN

Ruckus' BeamFlex+ adaptive antennas allow the R720 AP to dynamically choose among a host of antenna patterns (over 4,000 possible combinations) in real-time to establish the best possible connection with every device. This leads to:

- Better Wi-Fi coverage
- Reduced RF interference

Traditional omni-directional antennas, found in generic access points, oversaturate the environment by needlessly radiating RF signals in all directions. In contrast, the Ruckus BeamFlex+ adaptive antenna directs the radio signals perdevice on a packet by-packet basis to optimize Wi-Fi coverage and capacity in realtime to support high device density environments. BeamFlex+ operates without the need for device feedback and hence can benefit even devices using legacy standards.

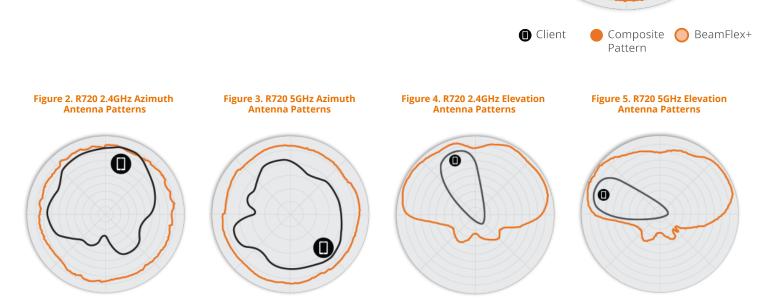

Note: The outer trace represents the composite RF footprint of all possible BeamFlex+ antenna patterns, while the inner trace represents one BeamFlex+ antenna pattern within the composite outer trace.

R720 Indoor 802.11ac Wave 2 4x4:4 Wi-Fi Access Point with 2.5Gbps backhaul

WI-FI	
Wi-Fi Standards	IEEE 802/11a/b/g/n/ac Wave 2
Supported Rates	 802.11ac: 6.5 to 1,733Mbps (MCS0 to MCS9, NSS = 1 to 4 for VHT20/40/80, NSS = 1 to 2 for VHT160) 802.11n: 6.5 Mbps to 600Mbps (MCS0 to MCS31) 802.11a/g: 54, 48, 36, 24, 18, 12, 9, 6Mbps 802.11b: 11, 5.5, 2 and 1 Mbps
Supported Channels	2.4GHz: 1-135GHz: 36-64, 100-144, 149-165
мімо	 4x4 SU-MIMO 4x4 MU-MIMO
Spatial Streams	• 4 for both SU-MIMO & MU-MIMO
Radio Chains and Streams	• 4x4:4
Channelization	• 20, 40, 80, 160/80+80MHz
Security	 WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i, Dynamic PSK WIPS/WIDS
Other Wi-Fi Features	 WMM, Power Save, Tx Beamforming, LDPC, STBC, 802.11r/k/v Hotspot Hotspot 2.0 Captive Portal WISPr

RF	
Antenna Type	 BeamFlex+ adaptive antennas with polarization diversity Adaptive antenna that provides 4,000+ unique antenna patterns per band
Antenna Gain (max)	• Up to 3dBi
Peak Transmit Power (Tx port/chain + Com- bining gain)	 2.4GHz: 29dBm 5GHz: 28dBm
Frequency Bands	 ISM (2.4-2.484GHz) U-NII-1 (5.15-5.25GHz) U-NII-2A (5.25-5.35GHz) U-NII-2C (5.47-5.725GHz) U-NII-3 (5.725-5.85GHz)

2.4GHZ RECEIVE SENSITIVITY							
HT20		HT40		VHT20		VHT40	
MCS0	MCS7	MCS0	MCS7	MCS0	MCS7	MCS0	MCS7
-96	-77	-93	-76	-96	-75	-93	-75

5GHZ RECEIVE SENSITIVITY											
VHT20 VHT40				VHT80							
MC S0	MC S7	MC S8	MC S9	MC S0	MC S7	MC S8	MC S9	MC S0	MC S7	MC S8	MC S9
-96	-75	-74	_	-94	-76	-66	-72	-90	-70	-68	-66

2.4GHZ TX POWER TARGET			
Rate	Pout (dBm)		
MCS0 HT20	22		
MCS7 HT20	19		

 SGHZ TX POWER TARGET

 Rate
 Pout (dBm)

 VHT20
 20

 MCS0, VHT40
 22

 MCS7, VHT40, VHT80
 19

 MCS9, VHT40, VHT80
 17

PERFORMANCE AND CAPACITY		
Peak PHY Rates	 2.4GHz: 600 Mbps 5GHz: 1733 Mbps	
Client Capacity	• Up to 512 clients per AP	
SSID	• Up to 31 per AP	

RUCKUS RADIO MANAGEMENT					
Antenna Optimization	 BeamFlex+ Polarization Diversity with Maximal Ratio Combining (PD-MRC) 				
Wi-Fi Channel Manage- ment	ChannelFlyBackground Scan Based				
Client Density Manage- ment	 Adaptive Band Balancing Client Load Balancing Airtime Fairness Airtime-based WLAN Prioritization 				
SmartCast Quality of Service	QoS-based schedulingDirected MulticastL2/L3/L4 ACLs				
Mobility	• SmartRoam				
Diagnostic Tools	Spectrum AnalysisSpeedFlex				

NETWORKING	
Controller Platform Support	 SmartZone ZoneDirector Unleashed¹ Standalone
Mesh	 SmartMesh[™] wireless meshing technology. Self- healing Mesh
IP	• IPv4, IPv6, dual-stack
VLAN	 802.1Q (1 per BSSID or dynamic per user based on RADIUS) VLAN Pooling Port-based
802.1x	Authenticator & Supplicant
Tunnel	L2TP, GRE, Soft-GRE
Policy Management Tools	 Application Recognition and Control Access Control Lists Device Fingerprinting Rate Limiting
loT Capbale	• Yes

¹ Refer to Unleashed datasheets for SKU ordering information.

PHYSICAL INTERFACES

	One 2.5Gbps Ethernet port and one 1Gbps Ether- net port
Ethernet	 Power over Ethernet (802.3af/at/bt) with Category 5/5e/6 cable LLDP
	• LLDP
USB	• 1 USB 2.0 port, Type A

PHYSICAL CHARACTERIST	YSICAL CHARACTERISTICS			
Physical Size	 22.7 cm (L), 21.3 cm (W), 6 cm (H) 8.9in (L) x 8.4in (W) x 2.4in (H) 			
Weight	• 1.12 kg (2.5 lb.)			
Mounting	Wall, acoustic ceiling, deskSecure bracket (sold separately)			
Physical Security	 Hidden latching mechanism Kensington Lock Hole T-bar Torx Bracket (902-0120-0000) Torx screw & padlock (sold separately) 			
Operating Temperature	 -10°C (14°F) - 50°C (122°F) 			
Operating Humidity	• Up to 95%, non-condensing			

POWER ²					
Power Supply	Operating Characteristics	Max Power Con- sumption			
802.3af PoE	 2.4GHz radio: 1x4, 18dBm per chain 5GHz radio: 1x4, 20dBm per chain 2nd Ethernet port & USB dis- abled 	12.95W			
802.3at PoE+	 2.4GHz radio: 4x4, 18dBm per chain 5GHz radio: 4x4, 20dBm per chain 2nd Ethernet port & USB dis- abled 	25.5W			
802.3bt/PoH/UPoE, In- jector, 48VDC	 2.4GHz radio: 4x4, 23dBm per chain 5GHz radio: 4x4, 22dBm per chain 	33.5W			

CERTIFICATIONS AND COMPLIANCE • Wi-Fi CERTIFIED[™] a, b, g, n, ac Wi-Fi Alliance³ Passpoint[®], Vantage • EN 60950-1 Safety • EN 60601-1-2 Medical • EN 61000-4-2/3/5 Immunity • EN 50121-1 Railway EMC • EN 50121-4 Railway Immunity Standards Compliance⁴ IEC 61373 Railway Shock & Vibration • UL 2043 Plenum • EN 62311 Human Safety/RF Exposure • WEEE & RoHS ISTA 2A Transportation

SOFTWARE AND SERVICES	
Location Based Services	• SPoT
Network Analytics	SmartCell Insight (SCI)
Security and Policy	Cloudpath

ORDERING INFORMATION	
901-R720-XX00	• R720 dual-band (5GHz and 2.4GHz concurrent) Wave 2 802.11ac wireless access point, 4x4:4 streams, adaptive antennas, dual ports, PoE sup- port. Includes adjustable acoustic drop ceiling bracket. One Ethernet port is 2.5GbE. Does not in- clude power adaptor.

See Ruckus price list for country-specific ordering information. Warranty: Sold with a limited lifetime warranty.

For details see: http://support.ruckuswireless.com/warranty.

OPTIONAL ACCESSORIES	
902-0180-XX00	• PoE Injector (60W)
902-1170-XX00	• Power Supply (48V, 0.75A, 36W)
902-0120-0000	Spare, Accessory Mounting Bracket
902-0195-0000	• Spare, T-bar ceiling mount kit for mounting to flush frame ceiling

PLEASE NOTE: When ordering Indoor APs, you must specify the destination region by indicating -US, -WW, or -Z2 instead of XX. When ordering PoE injectors or power supplies, you must specify the destination region by indicating -US, -EU, -AU, -BR, -CN, -IN, -JP, -KR, -SA, -UK, or -UN instead of -XX.

For access points, -Z2 applies to the following countries: Algeria, Egypt, Israel, Morocco, Tunisia, and Vietnam.

² Max power varies by country setting, band, and MCS rate.
 ³ For complete list of WFA certifications, please see Wi-Fi Alliance website.

⁴ For current certification status, please see price list.

Copyright © 2019 Ruckus Networks, an ARRIS company. All rights reserved. No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from Ruckus Networks ("Ruckus"). Ruckus reserves the right to revise or change this content from time to time without obligation on the part of Ruckus to provide notification of such revision or change.

The Ruckus, Ruckus Wireless, Ruckus logo, Big Dog design, BeamFlex, ChannelFly, EdgeIron, FastIron, HyperEdge, ICX, IronPoint, OPENG, and Xclaim and trademarks are registered in the U.S. and other countries. Ruckus Networks, Dynamic PSK, MediaFlex, Simply Better Wireless, SmartCast, SmartCell, SmartMesh, SpeedFlex, Unleashed, and ZoneDirector are Ruckus trademarks worldwide. Other names and brands mentioned in these materials may be claimed as the property of others.

Ruckus provides this content without warranty of any kind, implied or expressed, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Ruckus may make improvements or changes in the products or services described in this content at any time. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.



350 West Java Dr., Sunnyvale, CA 94089 USA www.ruckusnetworks.com 19-01-E